

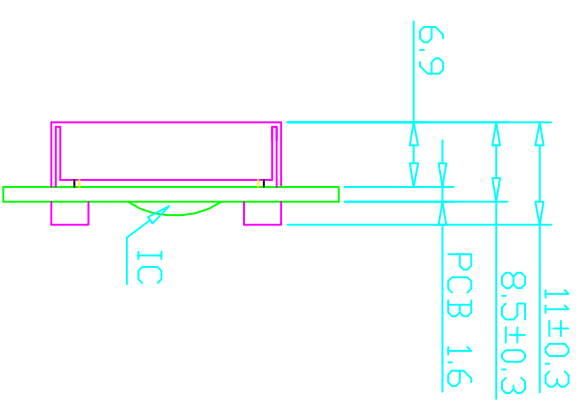


INTERFACE

1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

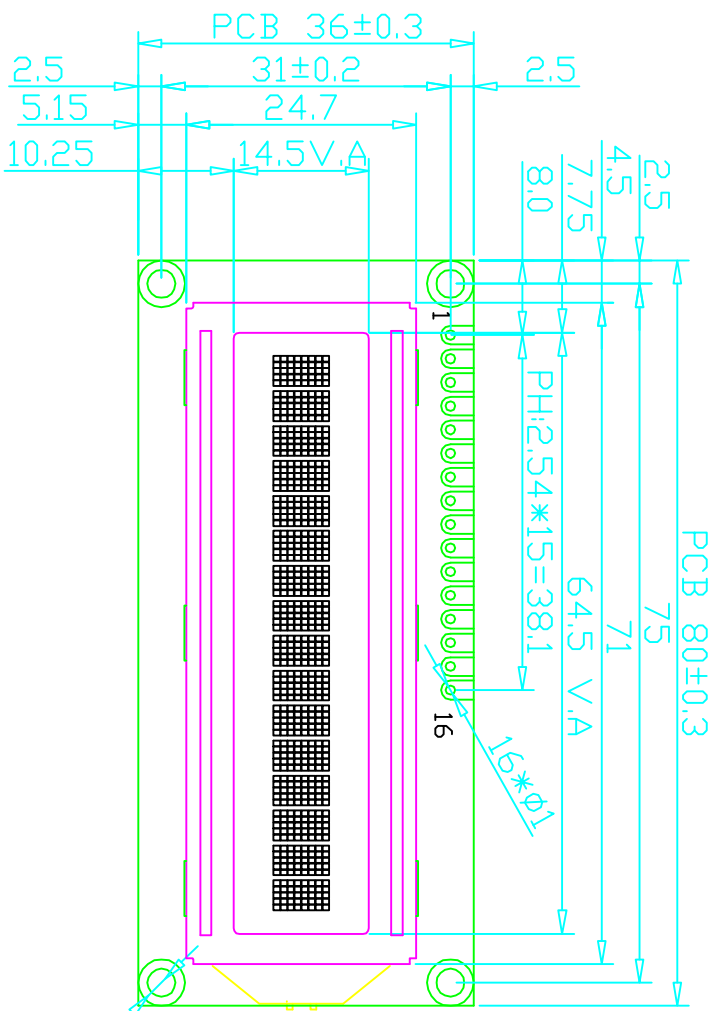

DOT SIZE:

- SPECIFICATION:
- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
 - 2). DUTY: 1/16. BIAS: 1/5. VOP=4. 7V
 - 3). VIEWING ANGLE: 6 0' CLOCK
 - 4). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
 - 5). BACKLIGHT: WHITE I=20MA
 - 6). DRIVE IC: SPLC780
 - 7). DRIVE POWER: VDD=5. 0V

VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-11-28

深圳市金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/11/28	LCM1601A	PROJECTION:	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO:					2011/11/28

DO NOT SCALE THIS DRAWING.