



INTERFACE
1 VSS
2 VDD(5V)
3 V0
4 RS
5 RW
6 E
7 DB0
8 DB1
9 DB2
10 DB3
11 DB4
12 DB5
13 DB6
14 DB7
15 LED-A(5V)
16 LED-K

VER DETAIL DISCRPTION	DATE
00 FIRST ISSUE	2011-11-28

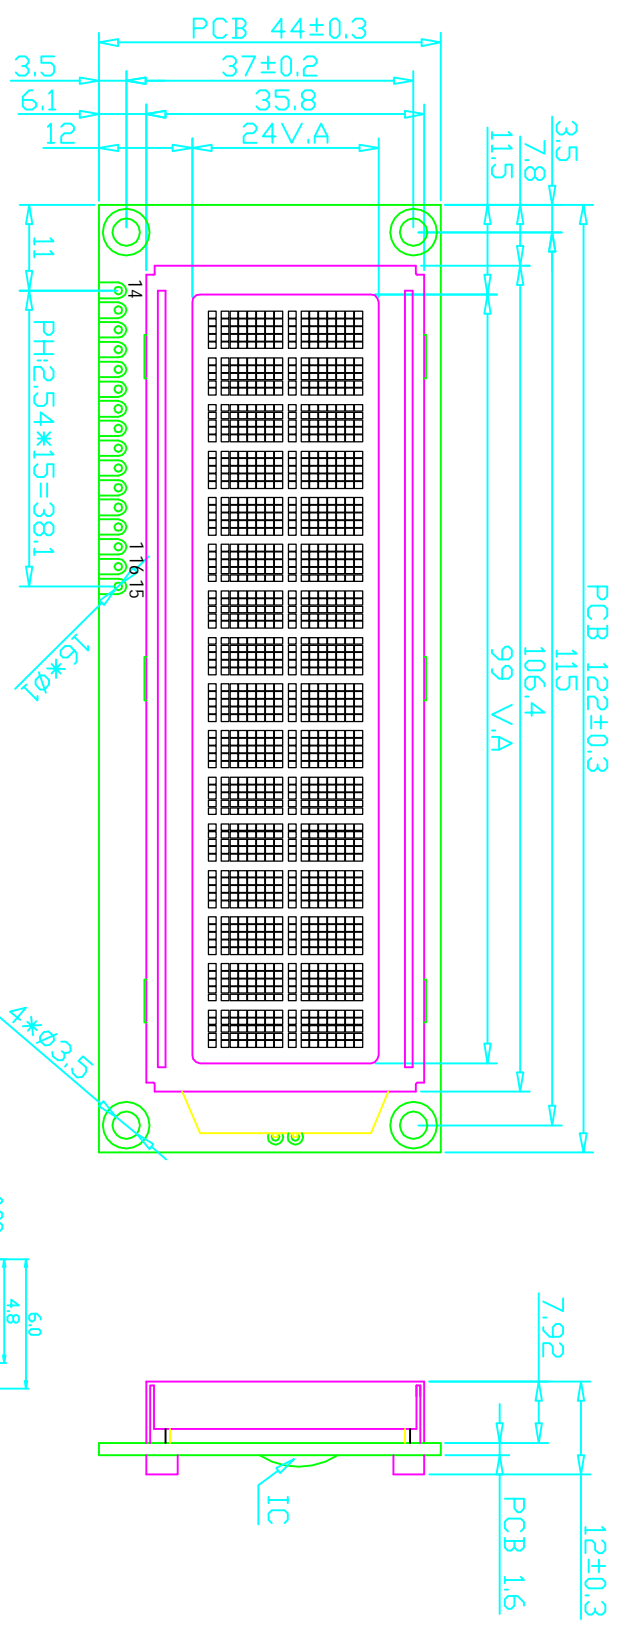

DOT SIZE:

**SPECIFICATION:**

- 1). STN(BLUE) /NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=4. 8V
- 3). VIEWING ANGLE: 6 0' CLOCK
- 4). OPERATING TEMPERATURE: -20~70°C  
STORAGE TEMPERATURE: -30~80°C
- 5). BACKLIGHT: WHITE I=60MA
- 6). DRIVE IC: SPLC780
- 7). DRIVE POWER: VDD=5. 0V

深圳市金彩科技有限公司

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/11/28	LCM1602B	1 OF 1	
CHECKED BY:					
CUSTOM NO.:					
DO NOT SCALE THIS DRAWING.					
			PROJECTION	DATE:	2011/11/28