

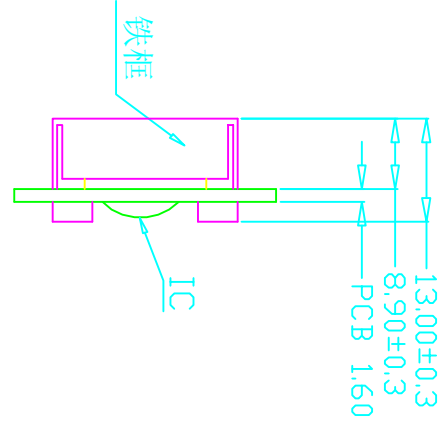


INTERFACE

1	VSS
2	VDD
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

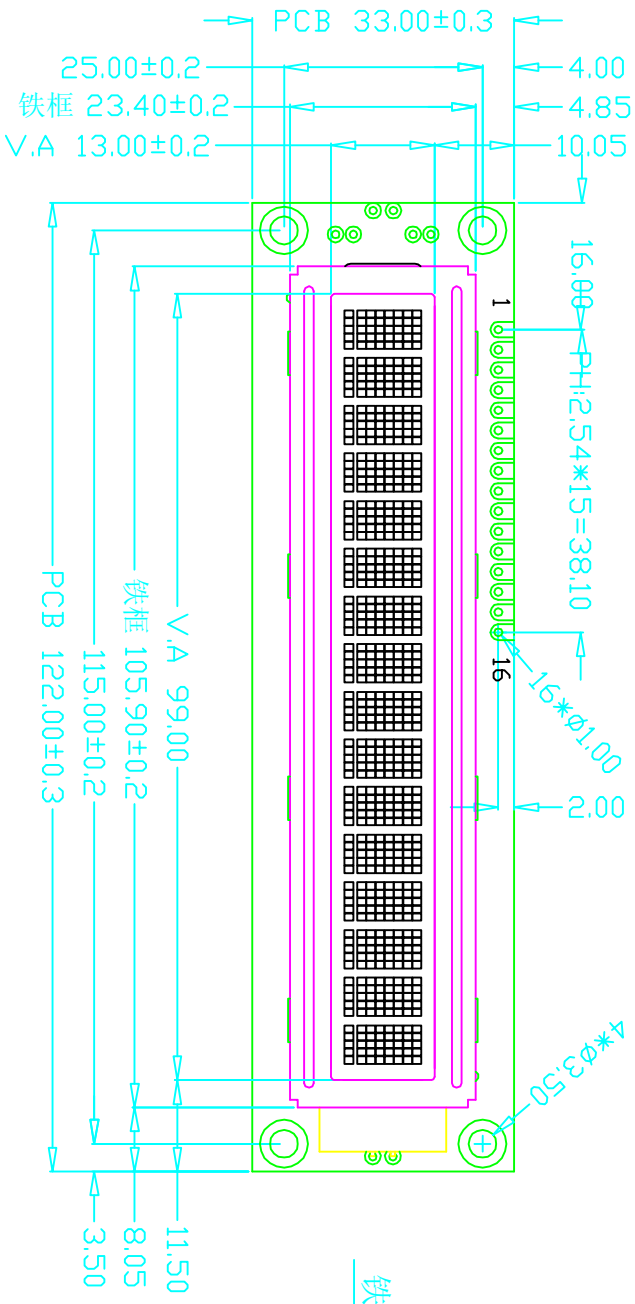

SPECIFICATION:

- 1). STN(BLUE)/NEGATIVE/TRANSMISSIVE
- 2). DUTY: 1/16. BIAS: 1/5. VOP=4.7V
- 3). VIEWING ANGLE: 60°CLOCK
- 4). DRIVE VOLTAGE: 5.0V
- 5). OPERATING TEMPERATURE: -20~70°C
STORAGE TEMPERATURE: -30~80°C
- 6). BACKLIGHT: WHITE I=20MA
- 7). DRIVE IC: SPLC780

VER	DETAIL DISCRPTION	DATE
00	FIRST ISSUE	2011-12-2

深圳市金彩科技有限公司

Unspecified Tolerance:	± 0.20	UNITS: mm	DATE:	MODE NUMBER:	SHEET:
DESIGN BY:	WZQ	2011/12/2	LCM1601B	PROJECTION	1 OF 1
CHECKED BY:					DATE:
CUSTOM NO.:					2011/12/2

DO NOT SCALE THIS DRAWING.